

ABSTRACT OF THE DISCLOSURE


A fuel oil comprising:

A) a mineral oil having a cloud point of less than -8°C , a boiling range (90-20%)
5 of less than 120°C and a difference between CFPP and PP of less than 10°C ,

and


B) one or more copolymers, wherein the copolymers comprise:

a) bivalent structural unit (B1), wherein (B1) is a bivalent structural unit of
10 formula (1)



and

b) one or more bivalent structural units (B2), wherein
(B2) is either a bivalent structural unit of formula (2)



in which


R^1 is hydrogen or methyl,

R^2 is COOR^3 , OR^3 or OCOR^3 , and

R^3 is an alkyl radical having at least 4 and at most 30 carbon
atoms,

or

(B2) is a bivalent structural unit of formula (2a)

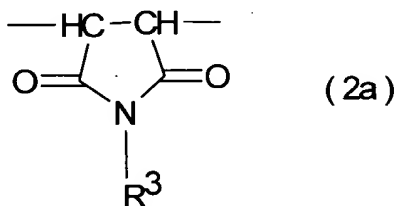

in which

R^3 is an alkyl radical having at least 4 and at most 30 carbon
atoms.